



目录

吊卡系列:

DDZ 系列对开式吊卡

DD (TA) 系列油管吊卡

DD 系列对开式吊卡

CDZ 系列钻杆吊卡

CD 型 吊 卡

SLX 套管吊卡

BD 闭锁环式油管吊卡

DDF 单根吊卡

卡瓦式吊卡

抽油杆吊卡

吊环系列:

DH 单臂吊环

SH 双臂吊环

卡瓦系列:

钻杆卡瓦

套管卡瓦

钻铤卡瓦

安全卡瓦

吊 钳



泰兴石油机械有限公司

吊卡系列

DDZ 系列对开式吊卡

DDZ 对开式锥度吊卡



DDZ 型钻杆吊卡

规格 型号	吊 卡 孔 径 (mm)	适 用 钻 杆 规 格			额定载荷(kN) 和外形尺寸 (长×宽×高) (L×W×H) (mm)	各 载 荷 吊 卡 的 大 约 净 重 (kN/short ton) (kgs)				
		规格 (in)	公称 尺寸 (mm)	颈部直径 (mm)		900 (100)	1350 (150)	2250 (250)	3150 (350)	4500 (500)
DDZ 67	67.47	2 $\frac{3}{8}$ EU	60.33	65.09	65(585) 405×308×214	40	132	—	—	—
DDZ 83	83.34	2 $\frac{7}{8}$ EU	73.03	80.96		39	128	278	—	—
DDZ 101	100.81	3 $\frac{1}{2}$ EU	88.90	98.43	100(900) 425×332×234	38.5	126	273	364	511
DDZ 109	108.74	4IU	101.60	106.36	150(1350) 585×535×280	38	125	270	361	509
DDZ 121	121.44	4EU	101.60	114.30	250(2250) 768×710×320	—	220	266	355	500
		4 $\frac{1}{2}$ IU	114.30	119.06		—	215	260	348	492
DDZ 133	133.35	4 $\frac{1}{2}$ EU	114.30	127.00	350(3150) 781×754×390	—	212	256	339	480
		5IEU	127.00	130.18		—	—	—	335	474
DDZ 148	147.64	5 $\frac{1}{2}$ IEU	139.70	144.46	500(4450) 840×800×450	—	—	—	—	—
DDZ 179	178.59	6 IEU	168.28	176.21		—	—	—	—	—



泰兴石油机械有限公司

DDZ(T)对开式锥度吊卡



规格 型号	吊卡 孔径 (mm)	适用钻杆规格			额定载荷(kN) 和外形尺寸 (长×宽×高) (L×W×H) (mm)	各载荷吊卡的大约净重 (kN/short ton) (kgs)		
		规格 (in)	公称 尺寸 (mm)	颈部直径 (mm)		2250 (250)	3150 (350)	4500 (500)
DDZ(T)101	100.81	3½EU	88.90	98.43	250(2250) 840×800×370			
DDZ(T)109	108.74	4IU	101.60	106.36				
DDZ(T)121	121.44	4EU	101.60	114.30	350(3150) 900×840×390 850×830×390			
		4½IU	114.30	119.06				
DDZ(T)133	133.35	4½EU	114.30	127.00	500(4450) 930×850×430			
		5IEU	127.00	130.18				
DDZ(T)148	147.64	5½IEU	139.70	144.46				
DDZ(T)148	178.59	6 5/8IEU	168.28	176.21				

注:


- 1、表中 IU 表示内加厚，EU 表示外加厚，IEU 表示内外加厚。
- 2、表中所列各规格吊卡可任意选用表内之额定载荷系列。



泰兴石油机械有限公司

DD (TA) 系列油管吊卡

DD(TA)对开式直角台吊卡

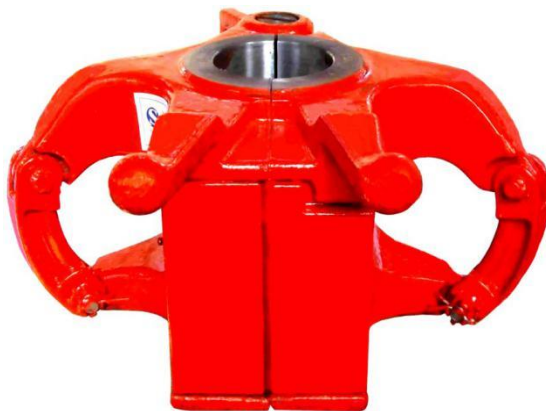

DD(TA)型油管吊卡

规格 型号	吊卡孔径 (mm)		适用油管规格			额定载荷(kN) 和外形尺寸 (长×宽×高) (mm)	各 载 荷 吊 卡 的 大 约 净 重 (kN/short ton) (kgs)			
	上孔	下孔	规格 (in)	公称 尺寸 (mm)	接头部位 最大外径 (mm)		540 (60)	900 100	1125 (125)	1350 (150)
DD 63	62.31	—	2%	60.33	65.09	65(585)	30.5	40	77	130
DD 63×69	62.31	68.66	2%EU	62.31	65.09	405×308×214	30.5	40	77	128
DD 75	75.01	—	2%	73.03	80.96	100(900) 425×332×234	30.2	39	76	128
DD 75×82	81.36	75.01	2%EU	73.03	80.96		30	39	76	127
DD 91	90.88	—	3½	88.90	98.43	125(1125) 515×490×254	29	38	75	126
DD 91×98	98.02	90.88	3½EU	88.90	98.43		29	38	75	125
DD 104	103.58	103.58	4	101.60	106.36	150(1350) 585×535×280	—	75	74	124
DD 104×111	110.74	103.58	4EU	101.60	106.36		—	74	74	122
DD 117	116.66	116.66	4½	114.30	119.06		—	73	73	121
DD 117×123	123.42	116.66	4½EU	114.30	119.06		—	72	72	119

注：

- 1、表中 IU 表示内加厚，EU 表示外加厚，IEU 表示内外加厚。
- 2、表中所列各规格吊卡可任意选用表内之额定载荷系列。



泰兴石油机械有限公司

DD 系列对开式吊卡

DD 对开式直角台阶吊卡



DD 型钻杆吊卡

规格 型号	吊卡孔径 (mm)	适用油管规格			额定载荷(kN) 和外形尺寸 (长×宽×高) (mm)	各 载 荷 吊 卡 的 大 约 净 重 (kN/short ton) (kgs)			
		规格 (in)	公称 尺寸 (mm)	颈部直径 (mm)		900 (100)	1350 (150)	2250 (250)	3150 (350)
DD 75×86	85.73	2¾EU	73.03	80.96	100(900)	77	127	268	—
DD 92×103	103.19	3½EU	88.90	98.43	425×332×234	76	126	266	345
DD 105×110	109.54	4IU	101.60	104.78	150(1350) 585×535×280	76	124	265	342
DD 105×118	122.24	4½EU	114.30	114.30		75	123	263	340
DD 118×122	122.24	4¾IEU	114.30	119.06	250(2250) 768×710×320	75	122	260	338
DD 118×131	131.00	4½EU	114.30	127.00		74	119	257	335
DD 131×135	134.94	5IEU	127.00	130.18	350(3150) 781×754×390	73	118	255	332
DD 144×149	149.23	5½IEU	139.70	144.46		72	117	252	329

注：

- 1、表中 IU 表示内加厚，EU 表示外加厚，IEU 表示内外加厚。
- 2、表中所列各规格吊卡可任意选用表内之额定载荷系列。



A red, heavy-duty mechanical fixture, likely a die or mold, with a central circular opening and various adjustment points. The fixture is made of a bright red material, possibly painted steel, and has a complex, blocky design. It features a large central circular cavity with a polished metal interior. There are two smaller circular openings on the top surface, each with a small diamond-shaped hole in the center. The fixture has several adjustment points, including a handle on the left side and a vertical rod on the right side. The overall shape is somewhat rectangular with rounded corners and a central vertical slot.

型号规格	吊卡孔径 (mm)	最大载荷 ton(kN)	钻杆规格及型式		接头最大外径	
			mm	in	mm	in
CDZ 2¾EU	67.47	100 (900) 150 (1350) 200 (1780) 250 (2500) 350 (3150) 500 (4500)	60.33	2¾EU	65.09	2 ⁹ / ₁₆
CDZ 2½EU	83.34		73.03	2½EU	80.96	3 ³ / ₁₆
CDZ 3½EU	100.81		88.90	3½EU	98.43	3¾
CDZ 4IU	108.74		101.60	4IU	106.36	4 ³ / ₁₆
CDZ 4½IEU	121.44		114.30	4½IEU	119.06	4 ¹¹ / ₁₆
CDZ 4½EU	133.35		114.30	4½EU	127.00	5
CDZ 5IEU	133.35		127.00	5 IEU	130.18	5¾
CDZ 5½IEU	147.64		139.70	5½IEU	144.46	5 ¹¹ / ₁₆
CDZ 5¾IEU	157.96		149.23	5¾IEU	155.58	6¾
CDZ 6¾IEU	178.59		168.28	6¾IEU	176.21	6 ¹⁵ / ₁₆

注： IU—内加厚钻杆，EU—外加厚钻杆，IEU—内外加厚钻杆。



泰兴石油机械有限公司

CD 型 吊 卡



钻杆吊卡

规格型号	孔 径		额定载荷 (ton/kN)	钻杆的尺寸与型式	
	上 孔 upper bore	下 孔 lower bore		in	mm
CD 2 $\frac{3}{8}$ EU(63×69)	69	63	100(900) 150(1350) 200(1800) 250(2250) 300(2700) 350(3150) 400(3600) 500(4500)	2 $\frac{3}{8}$ EU	60.3
CD 2 $\frac{7}{8}$ EU(76×86)	85.73 (86)	76		2 $\frac{7}{8}$ EU	73.0
CD 3 $\frac{1}{2}$ EU(92×103)	103.19 (103)	92		3 $\frac{1}{2}$ EU	88.9
CD 4IU (105×110)	109.54 (110)	105		4IU	101.6
CD 4EU (105×118)	117.48 (118)	105		4EU	101.6
CD 4 $\frac{1}{2}$ IU (118×122)	122.24 (122)	118		4 $\frac{1}{2}$ IU	114.3
CD 4 $\frac{1}{2}$ EU(118×131)	131	118		4 $\frac{1}{2}$ EU	114.3
CD 5IEU(131×135)	134.94 (135)	131		5IEU	127.0
CD 5 $\frac{1}{2}$ IEU(144×149)	149.23(149)	144		5 $\frac{1}{2}$ IEU	139.7

注：

IU—内加厚，EU—外加厚，IEU—内外加厚，允许钻杆吊卡上孔径与下孔径尺寸相同。



泰兴石油机械有限公司

套管吊卡

规格型号	孔径	套管外径		额定载荷 ton/kN	规格型号	孔径	套管外径	
		in	mm				in	mm
CD 4½	116.95	4½	114.30	100(900) 125(1125) 150(1350) 200(1800) 250(2250) 300(2700) 350(3150) 400(3600) 500(4500) 750(6750)	CD 13⅝	344.53	13⅝	339.73
CD 4¾	123.38	4¾	120.65		CD 13⅝	350.96	13⅝	346.08
CD 5	129.81	5	127.00		CD 14	360.61	14	355.60
CD 5½	142.67	5½	139.70		CD 16	412.04	16	406.40
CD 5¾	149.10	5¾	146.05		CD 18	463.48	18	457.20
CD 6	155.53	6	152.40		CD 18⅝	479.55	18⅝	473.00
CD 6⅝	171.60	6⅝	168.28		CD 20	514.98	20	508.00
CD 7	181.24	7	177.85		CD 21½	553.46	21½	546.10
CD 7⅝	197.32	7⅝	193.68		CD 22	566.29	22	558.85
CD 7¾	200.53	7¾	196.85		CD 24	617.60	24	609.60
CD 8⅝	223.03	8⅝	219.08		CD 24½	630.42	24½	622.30
CD 9	232.68	9	228.60		CD 26	668.9	26	660.40
CD 9⅝	248.42	9⅝	244.48		CD 27	694.56	27	685.80
CD 9⅞	254.85	9⅞	250.83		CD 28	720.21	28	711.20
CD 10¾	277.35	10¾	273.05		CD 30	771.52	30	752.00
CD 11¾	303.07	11¾	298.45		CD 32	822.83	32	812.80
CD 12⅞	331.67	12⅞	327.03		CD 36	925.44	36	914.40



泰兴石油机械有限公司

R 型钻铤吊卡

规格型号	吊卡孔径 (mm)	额 定 载 荷 ton/kN	钻 铤 外 径		钻铤吊卡槽直径 (mm)
			in	mm	
CD 4 $\frac{1}{8}$	96.84	100(900) 125(1125) 150(1350) 200(1800)	4 $\frac{1}{8}$	104.77	93.26
CD 4 $\frac{1}{4}$	111.13		4 $\frac{1}{4}$	120.65	107.95
CD 5	117.48		5	127.00	114.30
CD 5 $\frac{1}{4}$	123.83		5 $\frac{1}{4}$	133.30	120.60
CD 5 $\frac{1}{2}$	130.18		5 $\frac{1}{2}$	139.70	127.0
CD 5 $\frac{3}{4}$	133.35		5 $\frac{3}{4}$	146.05	130.17
CD 6	139.71		6	152.40	136.53
CD 6 $\frac{1}{4}$	146.60		6 $\frac{1}{4}$	158.75	142.88
CD 6 $\frac{1}{2}$	152.40		6 $\frac{1}{2}$	165.10	149.23
CD 6 $\frac{3}{4}$	157.16		6 $\frac{3}{4}$	171.45	152.40
CD 7	163.51		7	177.80	158.75
CD 7 $\frac{1}{4}$	169.86		7 $\frac{1}{4}$	184.05	165.10
CD 7 $\frac{1}{2}$	176.21		7 $\frac{1}{2}$	190.50	171.45
CD 7 $\frac{3}{4}$	182.56		7 $\frac{3}{4}$	196.85	177.80
CD 8	188.91		8	203.20	184.15
CD 8 $\frac{1}{4}$	195.26		8 $\frac{1}{4}$	209.55	190.50
CD 8 $\frac{1}{2}$	201.61		8 $\frac{1}{2}$	215.90	196.85
CD 9	212.73		9	228.60	206.38
CD 9 $\frac{1}{2}$	225.43		9 $\frac{1}{2}$	241.30	219.08
CD 9 $\frac{3}{4}$	231.78		9 $\frac{3}{4}$	247.65	225.40
CD 10	238.13		10	254.00	231.78
CD 11	263.53		11	279.40	257.18
CD 11 $\frac{1}{4}$	269.88		11 $\frac{1}{4}$	285.75	263.53



泰兴石油机械有限公司

P 型钻铤吊卡

吊卡型号	吊卡孔径 mm	适用钻铤外径. in	额定载荷 ton (kN)	吊卡型号	吊卡孔径 mm	适用钻铤外径 in
CD 3	80.17	3	150(1350) 200(1800)	CD 6½	170.66	6½
CD 3⅝	83.34	3⅝		CD 6¾	177.80	6¾
CD 3¾	86.52	3¾		CD 7	184.15	7
CD 3½(	92.87	3½		CD 7¼	169.86	7¼
CD 3¾	99.22	3¾		CD 7½	196.85	7½
CD 4	105.57	4		CD 7¾	203.20	7¾
CD 4⅝	108.74	4⅝		CD 8	209.55	8
CD 4¾	111.92	4¾		CD 8¼	215.90	8¼
CD 4½	118.27	4½		CD 8½	223.04	8½
CD 4¾	125.41	4¾		CD 8¾	229.39	8¾
CD 5	131.76	5		CD 9	235.74	9
CD 5¼	138.11	5¼		CD 9¼	242.09	9¼
CD 5½	144.46	5½		CD 9½	248.44	9½
CD 5¾	151.60	5¾		CD 10	263.73	10
CD 6	157.95	6		CD 10½	275.43	10½
CD 6¼	164.31	6¼		CD 11	288.13	11
CD 6⅝	167.48	6⅝				



泰 兴 石 油 机 械 有 限 公 司

油管吊卡

油管规格	油管外径 (mm)	不加厚油管吊卡孔径 (mm)	外加厚油管吊卡孔径		额 定 载 荷 t(kN)
			上孔	下孔	
1.9	48.26	50.19	55.96	50	40(360)
2 ³ / ₈	60.33	62.27	68.66	62	65(585)
2 ⁷ / ₈	73.03	75.00	81.36	75	75(675)
3 ¹ / ₂	88.90	90.87	98.02	91	100(900)
4	101.60	103.58	110.72	104	125(1125)
4 ¹ / ₂	114.30	116.95	123.42	117	150(1350)

注：允许外加厚油管吊卡上孔径与下孔径尺寸相同；外加厚油管吊卡不能用于非加厚油管。



SLX 套管吊卡



规格型号	孔 径	额 定 载 荷 kN/t	套 管 外 径	
			in	mm
SLX 117/()	117 (116.96)	1350 (150)	4½	114.30
SLX 123/()	123 (123.04)		4¾	120.65
SLX 130/()	130 (130.18)		5	127.00
SLX 142/()	142 (142.88)		5½	139.70
SLX 149/()	149 (149.23)		5¾	146.05
SLX 156/()	156 (156.58)		6	152.40
SLX 171/()	171 (171.45)		6⅝	168.28
SLX 181/()	181 (180.98)	1800 (200)	7	177.85
SLX 197/()	197 (197.64)		7⅝	193.68
SLX 200/()	200 (200.81)		7¾	196.85
SLX 223/()	223 (223.14)		8⅝	219.08
SLX 233/()	233 (232.56)	2250 (250)	9	228.60
SLX 248/()	248 (248.44)		9⅝	244.48
SLX 254/()	254 (254.79)		9⅞	250.83
SLX 277/()	277 (277.83)	2700 (300)	10¾	273.05
SLX 303/()	303 (303.23)		11¾	298.45
SLX 331/()	331 (331.80)		12⅞	327.03
SLX 344/()	344 (344.50)	3150 (350)	13⅜	339.73
SLX 350/()	350 (350.85)		13⅝	346.08
SLX 360/()	360 (360.76)		14	355.60
SLX 411/()	411 (411.96)		16	406.40
SLX 478/()	478 (479.43)		18⅝	473.00
SLX 515/()	515 (515.14)		20	508.00

*/() 括号中为额定载荷



泰兴石油机械有限公司

BD 闭锁环式油管吊卡



BD 系列吊卡

规格型号	油管外径		孔 径		最大载荷
			顶径	底径	
	in	mm	mm	mm	t (kN)
BD50(1.9) ¹ /() ²	1.9	48.26	50.39	50.39	40 (360) 65 (585) 75 (675)
BD56(1.9EU)/()	1.900EU	48.26	55.96	55.96	
BD63(2 ³ / ₈)/()	2 ³ / ₈	60.33	62.31	62.31	
BD68(2 ³ / ₈ EU)/()	2 ³ / ₈ EU	60.33	68.66	68.66	
BD76(2 ⁷ / ₈)/()	2 ⁷ / ₈	73.03	75.01	75.01	
BD82(2 ⁷ / ₈ EU)/()	2 ⁷ / ₈ EU	73.03	81.36	81.36	
BD92(3 ¹ / ₂)/()	3 ¹ / ₂	88.9	90.88	90.88	
BD98(3 ¹ / ₂ EU)/()	3 ¹ / ₂ EU	88.9	98.02	98.02	
BD104(4)/()	4	101.6	103.58	103.58	
BD110(4EU)/()	4EU	101.6	110.72	110.72	
BD117(4 ¹ / ₂)/()	4 ¹ / ₂	114.3	116.66	116.66	
BD123(4 ¹ / ₂ EU)/()	4 ¹ / ₂ EU	114.3	123.42	123.42	

注 1：表示油管的外径，EU 为外加厚型式。

注 2：括号内为吊卡的最大载荷



泰兴石油机械有限公司

DDF 单根吊卡



DDF 单根吊卡

规格型号	孔径	套管外径		额定载荷 ton/kN	规格型号	孔径	套管外径	
		in	mm				in	mm
CD 4½	116.95	4½	114.30	5(45) 10(90)	CD 13⅝	344.53	13⅝	339.73
CD 4¾	123.38	4¾	120.65		CD 13⅞	350.96	13⅞	346.08
CD 5	129.81	5	127.00		CD 14	360.61	14	355.60
CD 5½	142.67	5½	139.70		CD 16	412.04	16	406.40
CD 5¾	149.10	5¾	146.05		CD 18	463.48	18	457.20
CD 6	155.53	6	152.40		CD 18⅝	479.55	18⅝	473.00
CD 6⅝	171.60	6⅝	168.28		CD 20	514.98	20	508.00
CD 7	181.24	7	177.85		CD 21½	553.46	21½	546.10
CD 7⅝	197.32	7⅝	193.68		CD 22	566.29	22	558.85
CD 7¾	200.53	7¾	196.85		CD 24	617.60	24	609.60
CD 8⅝	223.03	8⅝	219.08		CD 24½	630.42	24½	622.30
CD 9	232.68	9	228.60		CD 26	668.9	26	660.40
CD 9⅝	248.42	9⅝	244.48		CD 27	694.56	27	685.80
CD 9⅞	254.85	9⅞	250.83		CD 28	720.21	28	711.20
CD 10¾	277.35	10¾	273.05		CD 30	771.52	30	752.00
CD 11¾	303.07	11¾	298.45					
CD 12⅞	331.67	12⅞	327.03					




泰兴石油机械有限公司

卡瓦式吊卡



HYT slip type elevator



YC slip type elevator



HYC slip type elevator

卡瓦式吊卡

型号	规格		额定载荷	
	In	Mm	tons	kN
YT	2 ³ / ₈ -3 ¹ / ₂	60.3-88.9	75	670
YC	3 ¹ / ₂ -7	88..9-117.8	75	670
HYT	2 ³ / ₈ -3 ¹ / ₂	60.3-88.9	150	1350
HYC	3 ¹ / ₂ -7	88..9-117.8	150	1350



泰 兴 石 油 机 械 有 限 公 司

抽油杆吊卡



抽油杆吊卡

型号规格	吊卡孔径 (mm)	最大载荷 KN(t)	配用抽油杆规格(in)
CDQ(S) 19/(最大载荷)	19	135 (15) 225 (25)	1/2—5/8
CDQ(S) 23/(最大载荷)	23		≥5/8—3/4
CDQ(S) 26/(最大载荷)	26		≥3/4—7/8
CDQ(S) 30/(最大载荷)	30		> 7/8—1
CDQ(S) 33/(最大载荷)	33		1⅞
CDQ(S)36/(最大载荷)	36		1¾



泰 兴 石 油 机 械 有 限 公 司

吊 环

DH 单臂吊环




DH 系列吊环

规格型号	额 定 载 荷		长 度
	US ton	kN	
DH 150	150	1335	1800
DH 200	200	1780	2700
DH 250	250	2225	2700
DH 350	350	3115	3300
DH 500	500	4450	3600
注： 1. 1 短吨≈8.896kN 2. 长度为我公司生产的常用吊环长度，用户需用其它长度规格的吊环。可在合同中注明。			



泰 兴 石 油 机 械 有 限 公 司

SH 双臂吊环

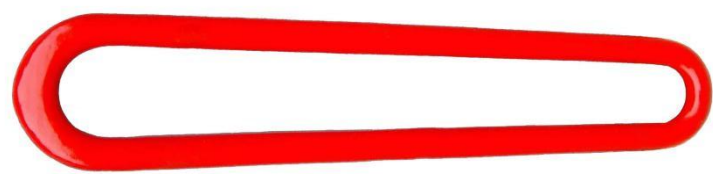

SH 系列吊环

规格型号	SH 40	SH 50	SH 65	SH 75	SH 100	SH 150
额定载荷	40t(355kN)	50t(445kN)	65t(580kN)	75t(665kN)	100t(890kN)	150t(1335kN)
长 度	1100mm	1100mm	1200mm	1500mm	1500mm	1700mm

注：

- 1. 1 短吨≈8.896kN 1 US ton≈8.896kN
- 2. 长度为我公司生产的常用吊环长度，用户需用其它长度规格的吊环。可在合同中注明



泰兴石油机械有限公司



卡瓦

钻杆卡瓦



规格型号			适用钻杆外径		配用牙板		重量 (kg)
			in	mm	代号	数量	
SDS	3½	2⅝	2⅝	60.3	2160	24	71
		2⅞	2⅞	73	2161	24	68
		3½	3½	88.9	2162	24	66
	4½	3½	3½	88.9	2163	36	83
		4	4	101.6	2164	36	80
		4½	4½	114.3	2165	36	76
SDML	3½	2⅝	2⅝	60.3	2160	30	98
		2⅞	2⅞	73	2161	30	95
		3½	3½	88.9	2162	30	92
	4½	3½	3½	88.9	2163	45	105
		4	4	101.6	2164	45	101
		4½	4½	114.3	2165	45	96
	5	4	4	101.6	2168	45	103.5
		4½	4½	114.3	2166	45	100
		5	5	127	2167	45	95
	5½	4½	4½	114.3	2168	45	101
		5	5	127	2169	45	97
		5½	5½	139.7	2170	45	92
SDXL	4½	3½	3½	88.9	2163	54	118
		4	4	101.6	2164	54	114
		4½	4½	114.3	2165	54	108
	5	4	4	101.6	2168	54	116
		4½	4½	114.3	2166	54	112
		5	5	127	2167	54	106
	5½	4½	4½	114.3	2168	54	116
		5	5	127	2169	54	111
		5½	5½	139.7	2170	54	105



泰兴石油机械有限公司

套管卡瓦



扣合管径		牙板代号-数量	卡瓦体数量	最大载荷 tons/kN
in	mm			
6 $\frac{5}{8}$	168.3	2628-144	12	250/2250
7	177.8	2619-144		
7 $\frac{5}{8}$	193.7	2630-144		
8 $\frac{5}{8}$	219.1	2630-156	13	
9 $\frac{5}{8}$ *	244.5	2630-168	14	
10 $\frac{3}{4}$ *	273.1	2630-180	15	
11 $\frac{3}{4}$ *	298.5	2627-204	17	
13 $\frac{5}{8}$ *	339.7	2630-216	18	
16*	406.4	2631-252	21	
18 $\frac{5}{8}$ *	473.1	2626-300	25	
20*	508	2631-312	26	
24*	609.6	2631-360	30	
26*	660.4	2631-396	33	
30*	762	2631-444	37	



泰兴石油机械有限公司

钻铤卡瓦



型 号	扣 合 管 径		牙板代号—数量	卡瓦体数量	使用内衬号
	in	mm			
DCS-S	3-4	76.2-101.6	2628-49	7	No.3
	4-4 $\frac{7}{8}$	101.6-123.8	2620-49	7	
DCS-R	4 $\frac{1}{2}$ -6	114.3-152.4	2628-63	9	
	5 $\frac{1}{2}$ -7	139.7-177.8	2620-63	9	
DCS-L	6 $\frac{3}{4}$ -8 $\frac{1}{4}$	171.4-209.6	2630-88	11	No.2
	8-9 $\frac{1}{2}$	203.2-241.3	2630-96	12	
	8 $\frac{1}{2}$ -10	215.9-254	2627-104	13	
	9 $\frac{1}{4}$ -11 $\frac{1}{4}$ *	235-285.7	2630-112	14	
	11-12 $\frac{3}{4}$ *	279.4-323.9	2625-128	16	No.1
	12-14*	304.8-355.6	2630-136	17	



泰兴石油机械有限公司

安全卡瓦



型 号	扣合管径 (in)	链节数	型 号	扣合管径 (in)	链节数
WA-T	1 ¹ / ₈ -2	4	MP-R	8-9 ¹ / ₄	10
	2 ¹ / ₈ -3 ¹ / ₄	5		9 ¹ / ₄ -10 ¹ / ₂	11
	3 ¹ / ₂ -4 ¹ / ₂	6		10 ¹ / ₂ -11 ¹ / ₂	12
WA-C	3 ¹ / ₂ -4 ⁵ / ₈	7	MP-M	11 ¹ / ₂ -12 ¹ / ₂	13
	4 ¹ / ₂ -5 ⁵ / ₈	8		12 ¹ / ₂ -13 ⁵ / ₈	14
	5 ¹ / ₂ -6.5/8	9		13 ⁵ / ₈ -14 ³ / ₄	15
	6 ¹ / ₂ -7 ⁵ / ₈	10		14 ³ / ₄ -15 ⁷ / ₈	16
	7 ¹ / ₂ -8 ⁵ / ₈	11	MP-L	15 ⁷ / ₈ -17	17
	8 ¹ / ₂ -9 ⁵ / ₈	12		17-18 ¹ / ₂	18
	9 ¹ / ₂ -10 ⁵ / ₈	13		18 ¹ / ₈ -19 ³ / ₈	19
	10 ¹ / ₂ -11 ⁵ / ₈	14	MP-XL	19 ³ / ₈ -20 ³ / ₈	19
	11 ¹ / ₂ -12 ⁵ / ₈	15		20 ³ / ₈ -21 ¹ / ₂	20
	12 ¹ / ₂ -13 ⁵ / ₈	16		21-22 ⁵ / ₈	21
	13 ¹ / ₂ -14 ⁵ / ₈	17		22 ⁵ / ₈ -23 ³ / ₄	22
	14 ¹ / ₂ -15 ⁵ / ₈	18		23 ³ / ₄ -24 ⁷ / ₈	23
MP-S	2 ⁷ / ₈ -4 ¹ / ₈	7		24 ⁷ / ₈ -26	24
	4-5	8		26-27 ¹ / ₈	25
MP-R	4 ¹ / ₂ -5 ⁵ / ₈	7		29 ³ / ₈ -30 ¹ / ₂	28
	5 ¹ / ₂ -7	8		35-36 ¹ / ₈	33
	6 ³ / ₄ -8 ¹ / ₄	9			



泰兴石油机械有限公司

吊钳

吊 钳



型 号	部件号	扣合钳尺寸		扭 矩
		mm	in	kN·m
QS 9-432/90 DB 型吊钳	2a	88.90-209.55	3½-8¾	90
	2b	203.20-285.75	8-11¼	90
	2c	298.45-365.12	11¾-11¾	55
	2d	406.40-431.80	16-17	55
QS 6-324/75 B 型吊钳	5a	85.73-133.35	3¾-5¼	55
	5b	127.00-203.20	5-8	75
	5b1	133.35-168.28	5¼-6⅝	75
	5b1	171.45-203.20	6¾-8	55
	5c	168.28-219.08	6⅝-8⅝	75
	5d	215.90-273.05	8½-10¾	55
	5e	298.45-323.85	11¾-12¾	55
Q 340-648/35 套管吊钳	9.8	339.72-368.30	13¾-14½	35
	9.7	368.30-406.40	14½-16	35
	9.9.8	406.40-444.50	16-17½	35
	9.8.7	444.50-482.60	17½-19	35
	8.7.7	482.60-508.00	19-20	35
	9.9.8	508.00-546.10	20-20½	35
	9.8.7.7	546.10-584.20	21½-23	35
	9.9.8.7.7	609.60-647.70	24-25½	35
Q 60-273/35 修井吊钳	3a	60.30-114.30	2⅝-4½	35
	3b	114.30-165.10	4½-6½	35
	3c	165.10-219.08	6½-8⅝	35
	3d	244.50-273.10	9⅝-10¾	35